


BEING A PARCEL LOCATED IN THE SE 1/4
OF SECTION 27, SALEM TOWNSHIP,
T-2-S, R-13-E, WYANDOT COUNTY, OHIO



1" = 50'
SCALE
0 50 100 150
FEET

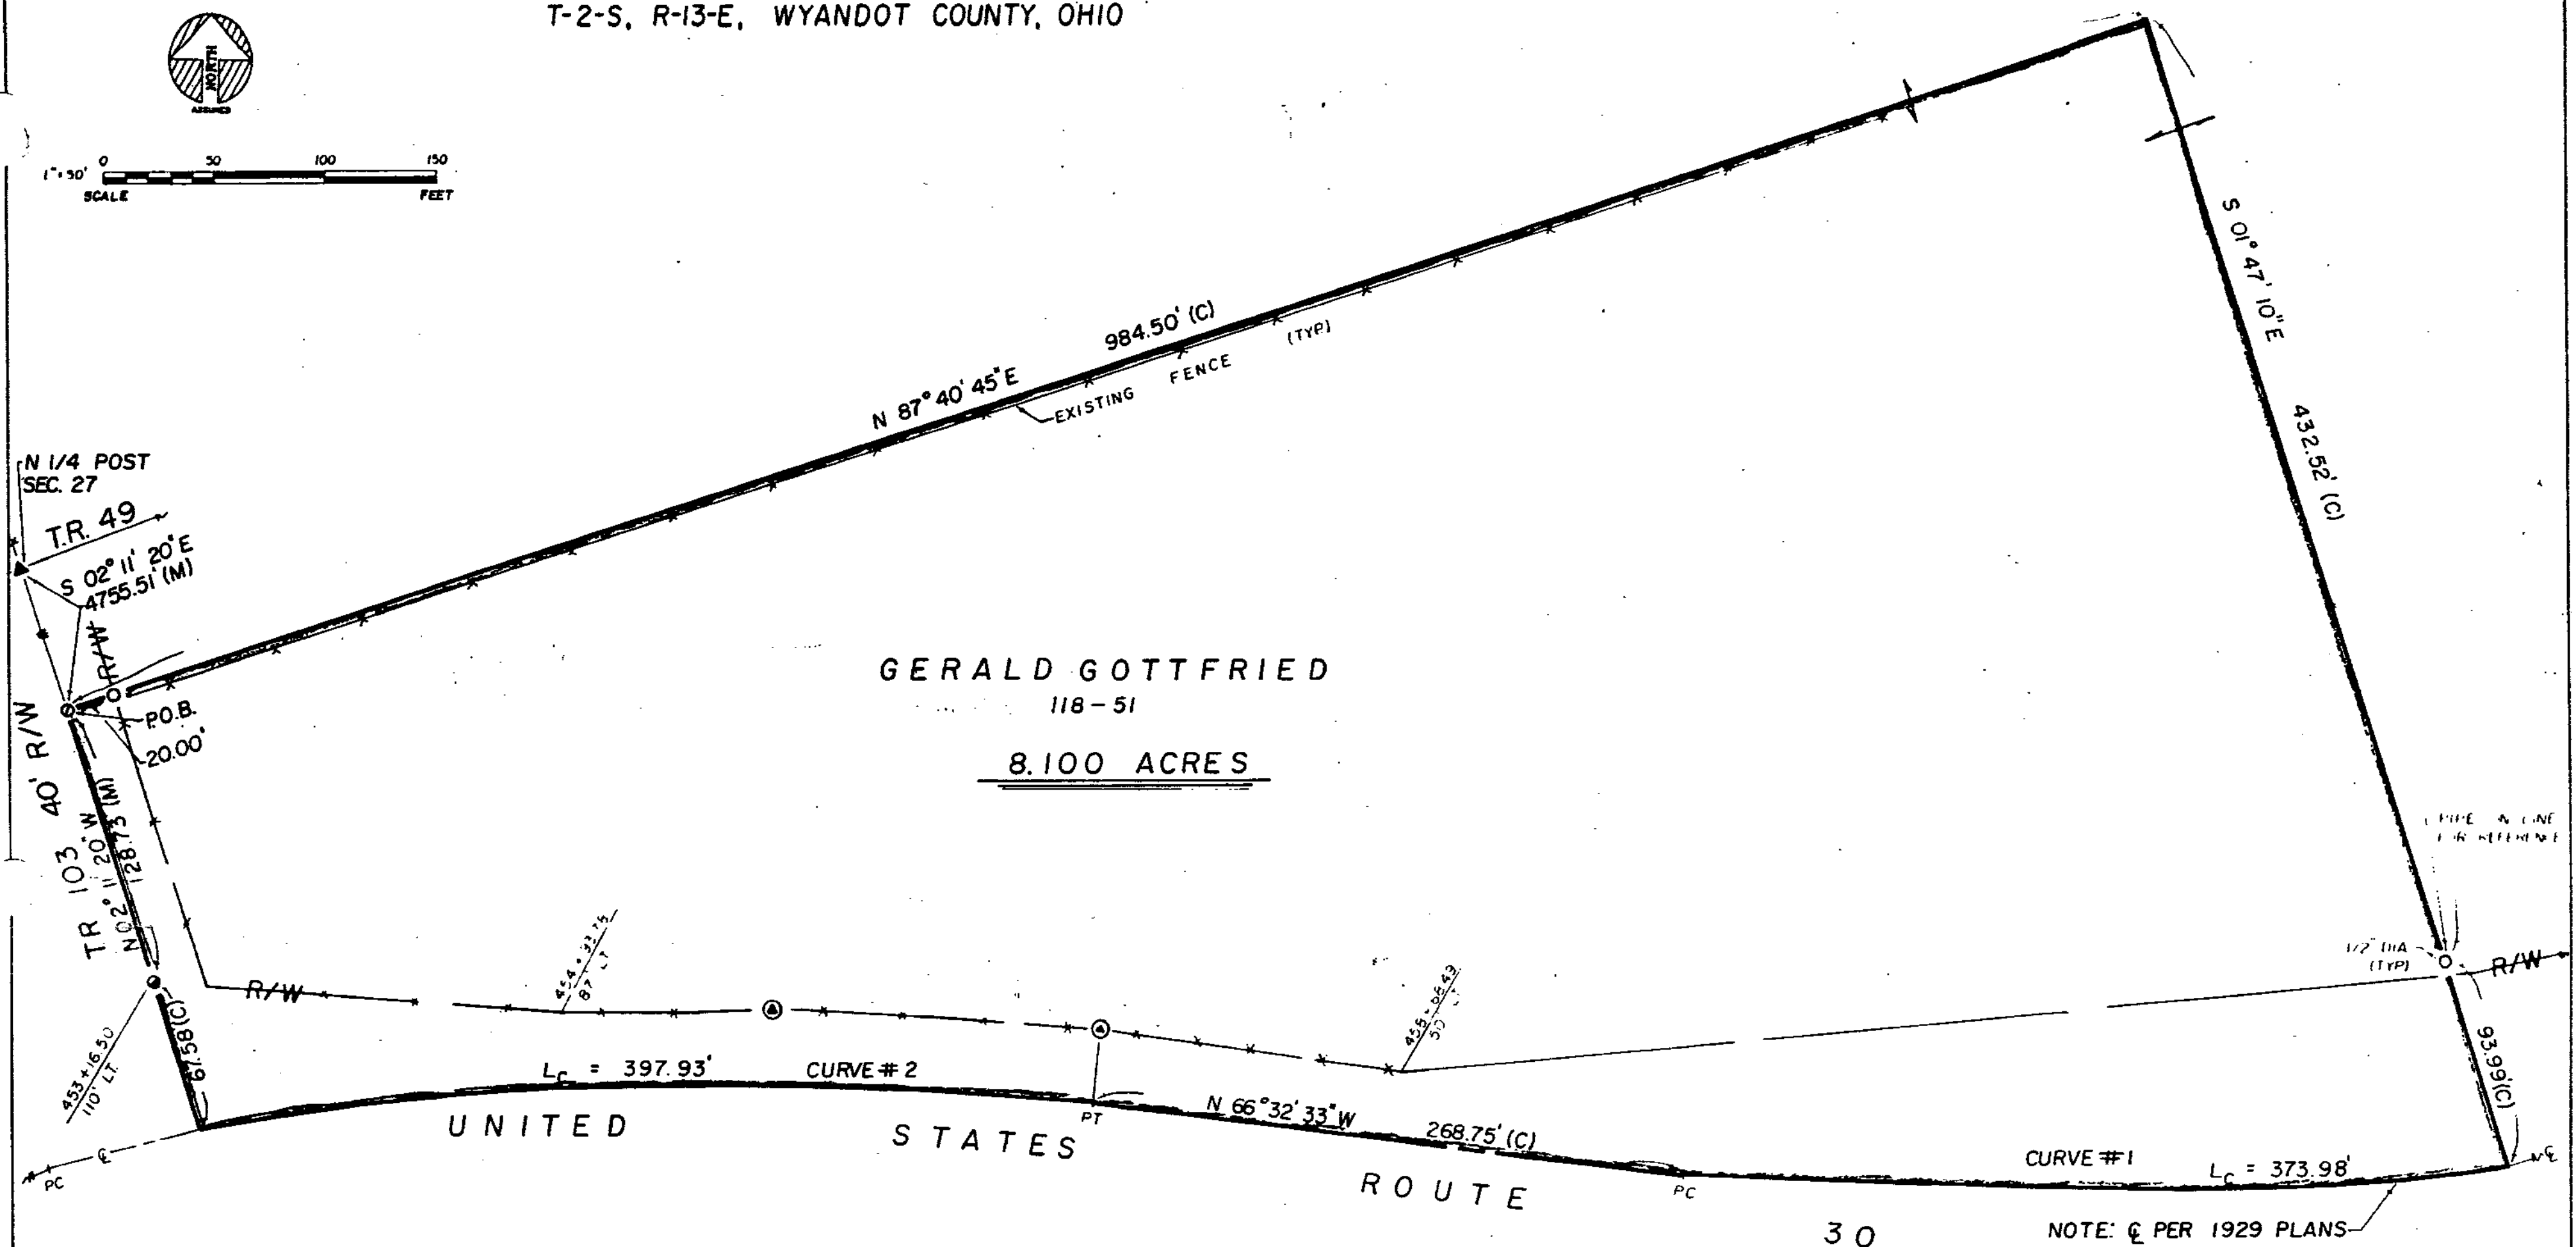

GERALD GOTTFRIED
118-51
8.100 ACRES

UNITED

STATES

ROUTE

30

NOTE: Q PER 1929 PLANS

Q CURVE DATA #2

R = 1145.92'
Δ = 19° 53' 47"
Lc = 397.93'
C = 395.93'
CH. BRG = N76° 29' 26" W

Q CURVE DATA #1

R = 1145.92'
Δ = 18° 41' 55"
Lc = 373.98'
C = 372.32'
CH. BRG = N75° 53' 31" W

REFERENCES

WYANDOT COUNTY CORNERSTONES
U.S. 30 ROAD PLANS DATED, 1929
U.S. 30 ROAD PLANS DATED, 1954
DEED VOL. & PAGE AS SHOWN
SURVEY # 897
DEED 121-433


3549

MAR 3 89
7 96

LEGEND

SET	FOUND	DESCRIPTION
△	△	STONE
□	□	MONUMENT BOX
⊕	⊕	CONC. MONUMENT
⊙	⊙	RAILROAD SPIKE
○	○	NAIL
○	○	IRON ROD
○	○	IRON PIPE
○	○	DRILL HOLE
○	○	WOOD POST
D		DEED
P		PLAT
M		MEASURED
S		SURVEYED
C		CALCULATED

I HEREBY DECLARE THAT THE ABOVE PARCEL WAS
SURVEYED DURING FEBRUARY, 1989.
PROPERTY LINES SHOWN ARE LOCATED FROM DEEDS
ON RECORD AND ARE DEED LINES. BEARINGS ARE
ASSUMED FOR ANGULAR MEASUREMENT ONLY. ALL
INFORMATION SHOWN IS TRUE AND CORRECT TO THE
BEST OF MY KNOWLEDGE AND BELIEF.

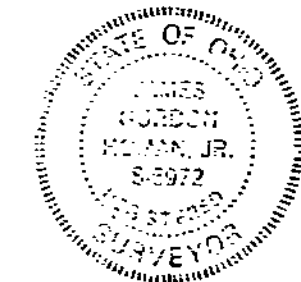

James G. Homan, Jr. 2-27-89
JAMES G. HOMAN, JR., P.S. NO. 6972