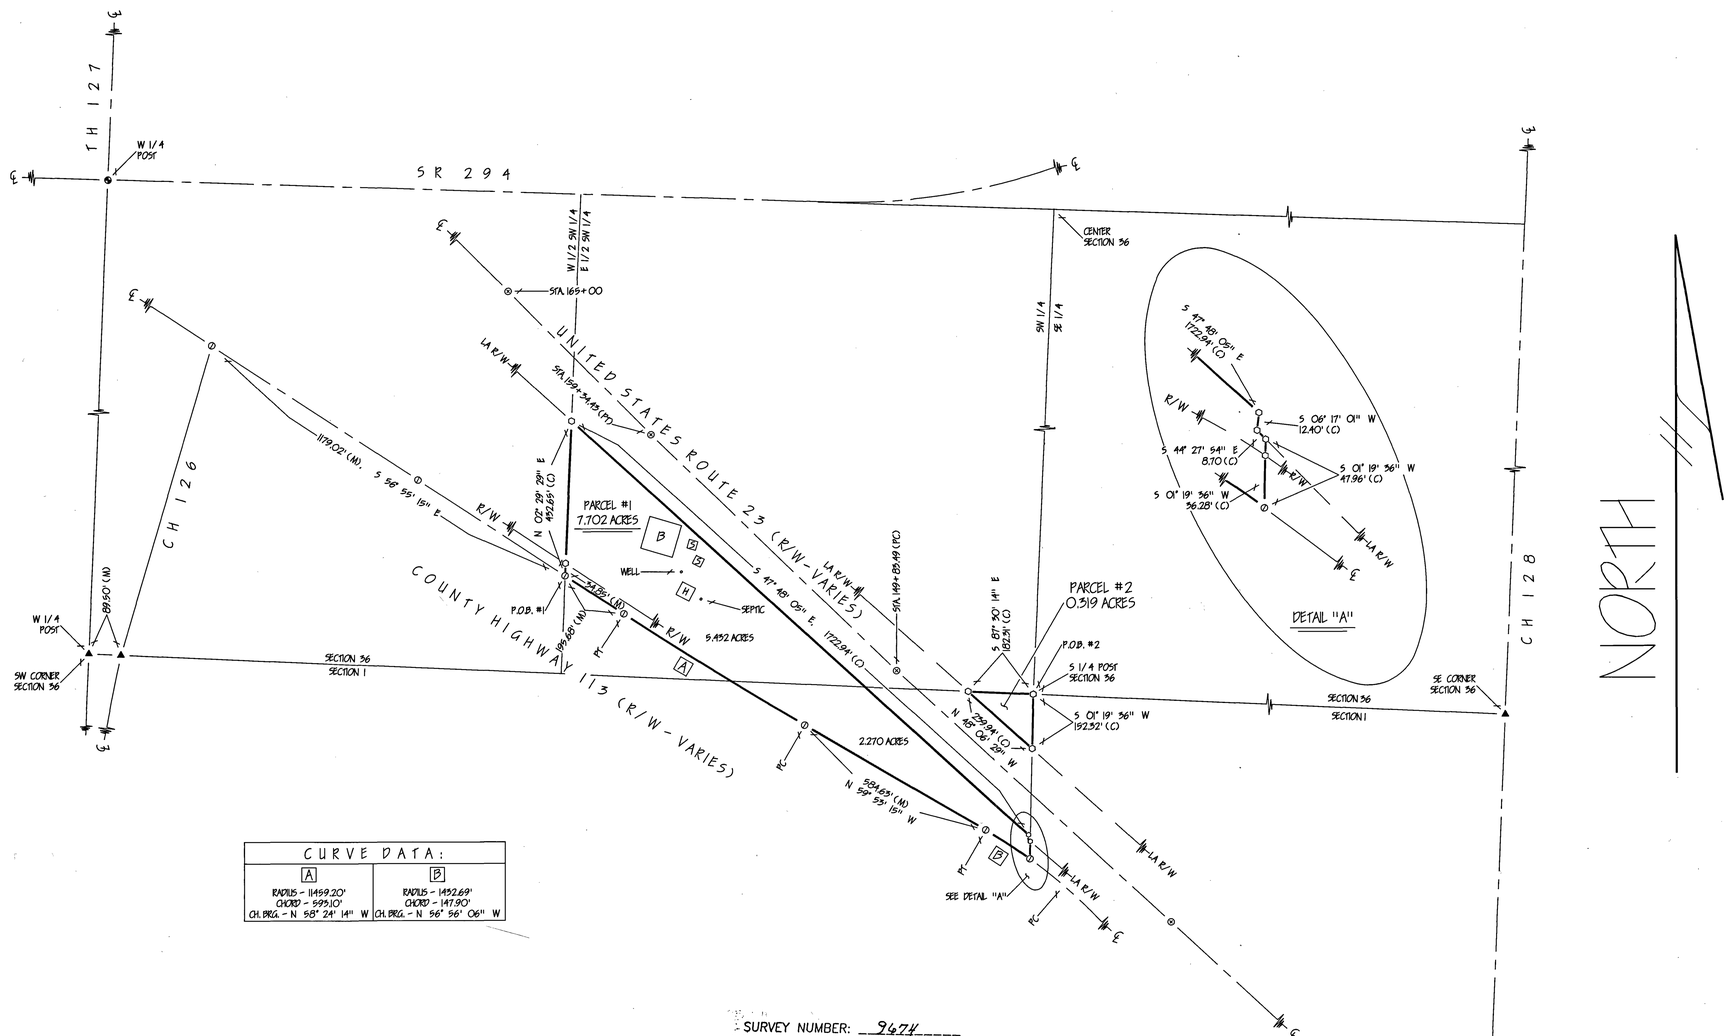

CURVE DATA:	
A	B
RADIUS - 11459.20'	RADIUS - 1452.69'
CHORD - 599.10'	CHORD - 147.90'
CH. BRG. - N 58° 24' 14" W	CH. BRG. - N 56° 56' 06" W

SURVEY NUMBER: 9674

VOLUME: D, PAGE: 011

FILING DATE: 8-12-96

1" = 200' SCALE — 0 200 400 600 FEET

REFERENCES

- DEED VOLUMES & PAGES AS SHOWN
- WYANDOT COUNTY CORNERSTONE RECORDS
- SURVEY VOLUME 6, PAGE 94.

LEGEND

SET	FOUND	DESCRIPTION
		MONUMENT
		RAILROAD SPIKE
		NAIL
		IRON PIPE
		DRILL HOLE
		1/2" IRON ROD WITH PERSONALIZED CAP
		IRON ROD
		FENCE POST
		STONE
		MONUMENT BOX
X-X		FENCE
D		DEED
P		PLAT
M		MEASURED
C		CALCULATED
ø		DIAMETER
S R		SURVEY RECORD
E/P		EDGE OF PAVEMENT
L.A. R/W		LIMITED ACCESS R/W
		CONCRETE RIGHT OF WAY MARKER
P/L		PROPERTY LINE

Note: This survey does not include a title search. Easements or other encumberences on or over the land are not shown on this survey.

I hereby certify that I have surveyed the above described property during July, 1996.
This survey is subject to all legal highways, easements, restrictions, leases of record and of records in respective utility offices.
The bearings referred to hereon are based on an assumed meridian and are only for the purpose of angular measurements.

Victor B. Koehler 07-26-96

VICTOR B. KOEHLER, P.S. NO. 7457 DATE

STATE OF OHIO — VICTOR B. KOEHLER — S-7457 — REGISTERED PROFESSIONAL SURVEYOR

VICTOR B. KOEHLER, P.S.
P.O. BOX 28
UPPER SANDUSKY, OHIO 43351
419-294-5388

SURVEY FOR: DALE CLEVER

LOCATED IN PART OF THE SOUTHWEST QUARTER OF SECTION 36, T-3-S, R-14-E & THE NORTHWEST QUARTER OF SECTION 1, T-3-S, R-14-E, PITT TOWNSHIP, WYANDOT COUNTY, OHIO.

DRAWN BY	CHECKED BY	REVISION
FRS 7-25-96	VBK 7-25-96	

1 / 1

96062-5